STAINLESS STEEL HINGE GLASS SALOON DOOR






STAINLESS STEEL ELECTRIC SALOON DOOR








(CUSTOM MADE)

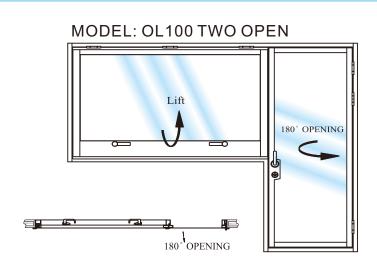



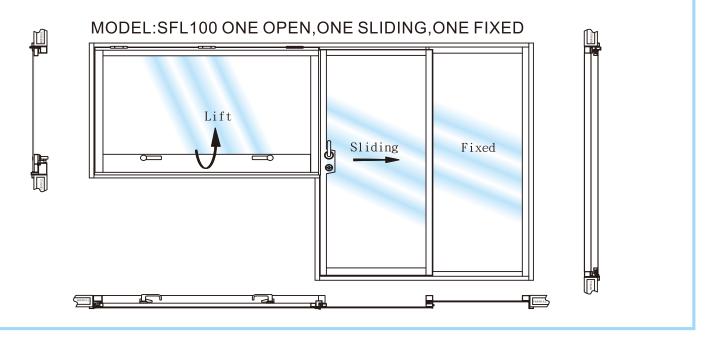

(CUSTOM MADE)






ELECTRIC SLIDING WINDOW (CUSTOM MADE)






- Main material is 6061T5 aluminum with surface powder coating. black and milky white(cream color)option
 Start with electric arm 24V, 6 m/m tempered glass slides up and down
- Power sliding window is designed can support the torsion of the ship during sailing and 100% weather tight feature and has the drain function.
- Tempered glass and accessories are easy to repair without removing the whole window A.Tempered glass can be removed and installed from the outside B.Internal accessories can be repaired from the inspection hole
- Please provide the following information when ordering powered sliding window (A1 \ A2)+(B1 \ B2)+C digging dimensions, then we will provide drawings and quotes.
- Remarks: If the size of the hold digging exceeds 1000m/m, because the glass weight is too heavy, you must add one more electric arm (two electric arms)

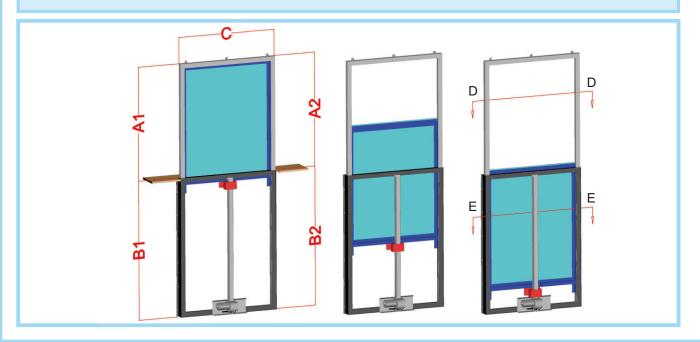

ELECTRIC OPENING WINDOW (CUSTOM MADE)



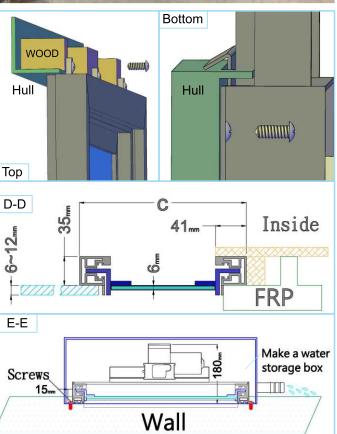



New developed base material is stainless steel 316, and colors are available:stainless steel primary, white and black powder coating.

Automatic opening window is installed in front of wheelhouse.


The open distance is 135mm with ventilation function.

Two arms moved by 24-12V motor.

5mm tempered glass with 100% watertight, strong and elegant.

Please advise A and B cutout size.

Manship will provide the drawing and quote.

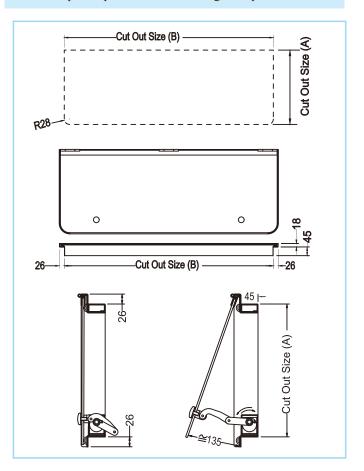





FEATURES

- MAN SHIP uses LINAK DESKLIFT DI4, DL11XL(two kinds of TV lift models)
 with 3-part telescopic column design combines to MANSHIP TV seat,
 compact and easily be installed.
- The power only can be used 120VAC/60Hz,230VAC/50Hz.
- Low and uniform noise level.
- Hall sensor enables parallel drive with CBD4, up to 16 legs in a multiparallel system.
- Double acting brake for increased self-locking.
- Approved according to EN 60335-4 and UL 962.
- MANSHIP also can custom make per customer's request and design TV lift spin function manually (180 degree).




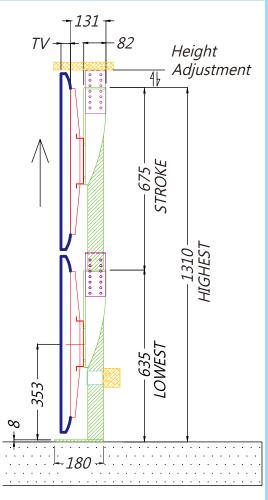


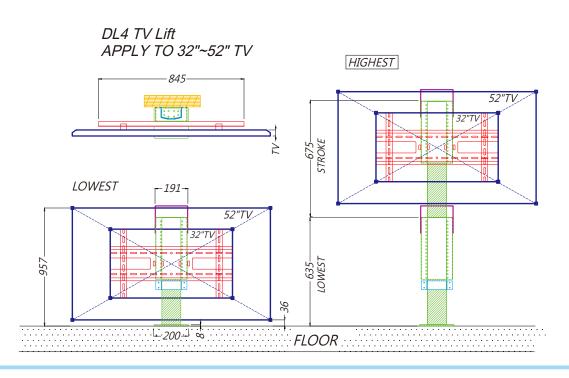





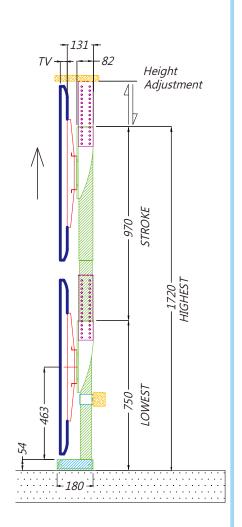

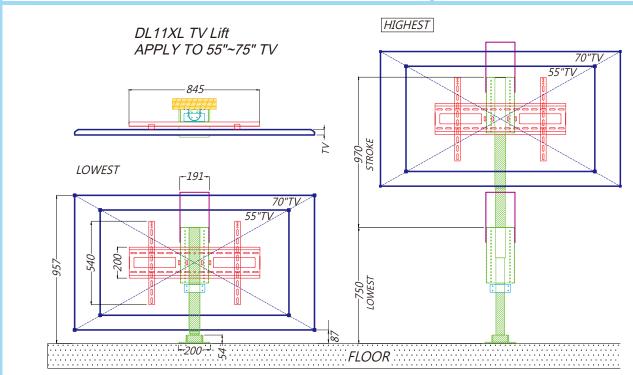


DECK FILLS




- 316 stainless steel. Hand polished and electro-polished to protect against corrosion.
- Each Deck Fill is marked with either: DIESEL, WATER, WASTE or ESSENCE.
- DIESEL Deck Fills come with a stainless steel tang for easy attachment of grounding wire.
- Each Deck Fill has an o-ring gasket for a tight seal.
- Your choice of Deck Fill cap: Standard type which opens with a key provided or Sailing yacht type which opens with any standard winch handle.









PART No.	PIPE SIZE	TYPE	MARK	_	PART No.	PIPE SIZE	TYPE	MARK
6546-11	1½ 38		WATER		6547-11	1½ 38	•••	WATER
6546-12	1½ 38		DIESEL		6547-12	1½ 38	•••	DIESEL
6546-13	1½ 38		WASTE		6547-13	1½ 38	•••	WASTE
6546-14	1½ 38	•	ESSENCE		6547-14	1½ 38	•••	ESSENCE
6546-21	2 51		WATER		6547-21	2 51	•••	WATER
6546-22	2 51		DIESEL		6547-22	2 51	•••	DIESEL
6546-23	2 51		WASTE		6547-23	2 51	•••	WASTE
6546-24	2 51	•	ESSENCE		6547-24	2 51	•••	ESSENCE






DORADES




FEATURES

- 18-8 non-magnetic stainless steel. Hand polished and electro-polished chrome plating to protect against corrosion.
- Snag-free design.
- Low profile with tear drop opening to allow maximum air to enter the dorade box.
- Stainless steel Deck Plate provided with O-ring.
- White or blue colored epoxy paint standard for the inside of the Dorade. Custom colors available on request by special order.







PART No.	Α	В	С	D	E	
6500-31	31/2 90	5 120	101/2 267	5⁄8 16	5 ³ / ₄ 145	
6500-41	43/8 112	61/4 160	13 5⁄8 346	5⁄8 16	7 ½ 180	
6500-51	5 7⁄ ₈ 150	7 7⁄8 200	15 3/4 400	7/8 22	7 ½ 190	
6500-71	7 180	10 256	19 ³ ⁄ ₄ 500	1 26	10 1/4 260	

IN/MM

DOOR CABINET LATCH PUSH BUTTON




• Cabinet Latch 7100



• Door Latch 7200



• Cabinet Latch 7300



• Door Latch 7400

MAN SHIP


FEATURES

- Easy to install, safe, and attractive outline.
- Button trim and interior spring are made of stainless steel to avoid corrosion.
- Can be used for thickness from 1/2"to 1". Standard thickness is 3/4.
- Dual action latch positive locking with button fully depressed.(7100.7300.7500)
- It will hold the door without locking.

 To depress button will link s/s shaft with clamp to hook up s/s tap for positive locking. (7200.7400.7600)
- Optional colors: silver/chrome, gold/titanium plated.

CAUTION:

To prevent breakage or damage. Do not activate the latch before the door has closed.





• Door Latch 7600

